



BH-H7

Domestic Gas Alarm


SIL  FC RoHS CE



24-hour independent operation
With backup power

Technical Parameters

Detecting gas:	CH ₄ , CO	Alarm Point:	Combustible gas: 10%LEL CO: 100PPM
Alarm Method:	Visual and audible	Sensor type:	Semiconductor sensor, Electrochemical sensor
Sensor life:	2 years(under normal use)	Power Consumption:	<4W
Power:	AC220±10%(Main power) 3.7V@3200mAh(backup battery)	Temperature:	-10°C~55°C
Response Time:	≤30s	Humidity:	<93% no dew
Sound:	≥70dB	Dimensions:	104.3x72.2x33.3mm
IP Rating	IP30	Weight:	About 210g

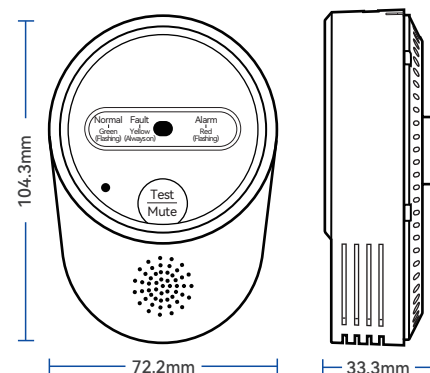




BH-H7 Domestic Gas Alarm


BH-H7 household gas detector (“the detector”) is widely used in residences, hotels, apartments and other locations. It uses high-quality gas sensors and advanced electronic technology. The detector warns of CO and combustible gas at levels above the alarm set-point. It is your responsibility to respond properly to the audible and visual alarm.

Functions and Indications

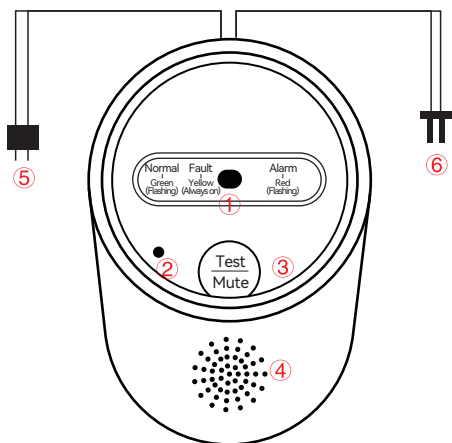

NO	Functions
①	Indicator
②	Buzzer
③	Test / Mute
④	Sensor inlet
⑤	Power Supply Cable
⑥	Output

Where is the right location for installation

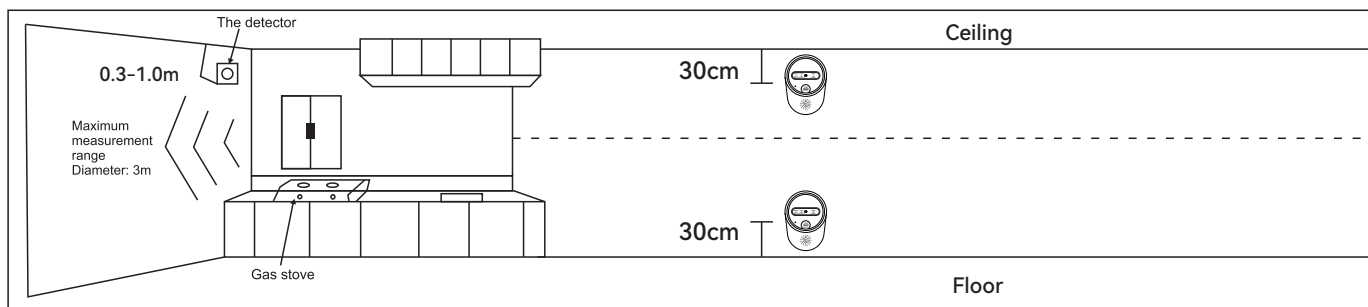

BE THE GUARDIAN OF GAS SAFETY AROUND YOU